



Flow restrictor, flow restrictor silencer, control valve, double-check valve, quick bleed valve

- For regulating the compressed air supply to consumers



Product variants described in the data sheet may differ from the product presentation and description.

Type description

Controllable valves for compressed air control

Table of contents

1. General technical data	3
1.1. Screwable and pluggable flow regulator	3
1.2. Quick exhaust valve	4
1.3. Restrictor and restrictor silencer	4
1.4. Shuttle valve	5
2. Approvals and conformities	5
2.1. General notes	5
2.2. Conformity	5
2.3. Standards	5
3. Materials	5
3.1. Bürkert resistApp	5
4. Product variants	6
4.1. Screwable and pluggable flow regulator	6
4.2. Quick exhaust valve	6
4.3. Restrictor and restrictor silencer	7
4.4. Shuttle valve	7
5. Ordering information	7
5.1. Bürkert eShop	7
5.2. Bürkert product filter	8
5.3. Ordering chart flow regulator, screwable and pluggable	8
Restrictor valve	8
Restrictor valve, block design	10
One-way flow restrictor (exhaust air)	10
One-way flow restrictor (inlet air)	12
One-way flow restrictor, block design	13
One-way flow restrictor, pluggable, block design, one-way control	13
Check valve with external thread and plug connection, flow from F to D	13
Check valve with external thread and plug connection, flow from D to F	14
Check valve with internal thread	14
Check valve with plug connection	14
Check valves with other types of connection	15
5.4. Ordering chart quick exhaust valve	16
Nickel-plated brass variant	16
Stainless steel variant	16
5.5. Ordering chart restrictor and restrictor silencer	17
Restrictor silencer, brass	17
Restrictor silencer, brass, cylindrical	17
Restrictor, nickel-plated brass, with exhaust air connection	17
Restrictor, nickel-plated brass, free bleed-off	17
5.6. Ordering chart shuttle valve	18

1. General technical data

1.1. Screwable and pluggable flow regulator

Note:

Other variants, connections, materials, seal materials on request

Product properties

Dimensions Further information can be found in the corresponding ordering chart the chapter **"4.1. Screwable and pluggable flow regulator"** on page 6.

Material

Body	• Nickel-plated brass • Stainless steel AISI 316/1.4401 • PBT • Aluminium
Seal O-ring	• Nickel-plated brass variant: NBR • Stainless steel variant: FKM • PBT variant: NBR • Aluminium variant: NBR

Performance data

Nominal pressure

Nickel-plated brass variant	Max. 10 bar ^{1.)}
Stainless steel variant	Further information can be found in chapter "4.1. Screwable and pluggable flow regulator" on page 6.
PBT variant	Max. 10 bar ^{1.)}
Aluminium variant	Max. 10 bar ^{1.)}

Medium data

Operating medium

Nickel-plated brass variant	Air, neutral gases
Stainless steel variant	Air, neutral gases
PBT variant	Air, neutral gases, liquids
Aluminium variant	Air, neutral gases, liquids

Medium temperature

Nickel-plated brass variant	-10...+70 °C
Stainless steel variant	-10...+120 °C
PBT variant	0...+60 °C
Aluminium variant	-10...+70 °C

1.) Pressure data: overpressure to atmospheric pressure

1.2. Quick exhaust valve

Note:

Other variants, connections, materials, seal materials on request

Product properties

Dimensions Further information can be found in the corresponding ordering chart in chapter **"5.4. Ordering chart quick exhaust valve"** on page 16.

Material

Body	- Nickel-plated brass - Stainless steel AISI 316/1.4401
Seal	- Nickel-plated brass variant: NBR - Stainless steel variant: FKM

Performance data

Nominal pressure

Nickel-plated variant	0.5...12 bar ^{1.)}
Stainless steel variant	0.5...10 bar ^{1.)}

Medium data

Betriebsmedium

Nickel-plated brass variant	Air, neutral gases
Stainless steel variant	Air, neutral gases

Medium temperature

Nickel-plated brass variant	0...+ 80 °C
Stainless steel variant	- 10...+ 120 °C

1.) Pressure data: overpressure to atmospheric pressure

1.3. Restrictor and restrictor silencer

Note:

Other variants on request

Product properties

Dimensions Further information can be found in the corresponding ordering chart the chapter **"5.5. Ordering chart restrictor and restrictor silencer"** on page 17.

Material

Body	Brass
------	-------

Performance data

Nominal pressure	$P_{max} = 12 \text{ bar}^{1.)}$
------------------	----------------------------------

Medium data

Operating medium	Air, neutral gases
Medium temperature	- 10 °C...+ 80 °C

1.) Pressure data: overpressure to atmospheric pressure

1.4. Shuttle valve

Note:

Other variants on request

Product properties

Dimensions Further information can be found in the corresponding ordering chart the chapter **"5.6. Ordering chart shuttle valve"** on page 18.

Material

Body Aluminium

Performance data

Nominal pressure 2...10 bar¹⁾

Process/Port connection and communication

Fluidic connection G 1/8, G 1/4

Medium data

Operating medium Filtered oil-free compressed dry air

Medium temperature -10...+ 80 °C

1.) Pressure data: overpressure to atmospheric pressure

2. Approvals and conformities

2.1. General notes

- The approvals and conformities listed below must be stated when making enquiries. This is the only way to ensure that the product complies with all required specifications.
- Not all available variants can be supplied with the below mentioned approvals or conformities.

2.2. Conformity

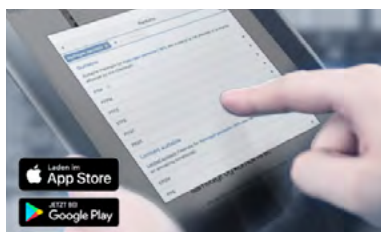
In accordance with the Declaration of Conformity, the product is compliant with the EU Directives.

2.3. Standards

The applied standards which are used to demonstrate compliance with the EU Directives are listed in the EU-Type Examination Certificate and/or the EU Declaration of Conformity.

3. Materials

3.1. Bürkert resistApp



Bürkert resistApp – Chemical resistance chart

You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.

[Start chemical resistance check](#)

4. Product variants

4.1. Screwable and pluggable flow regulator


Properties:

- Restrictor valve
 - One-way flow restrictor
 - One-way flow restrictor (exhaust air)
 - One-way flow restrictor (inlet air)
- Check valve

Features:

- M5...G 1/2" threaded connection
- 4...12 mm push-in connection
- Nickel-plated brass, stainless steel, PBT, aluminium

Further information regarding the **general technical data** can be found in chapter ["1.1. Screwable and pluggable flow regulator" on page 3.](#)

Further information regarding **ordering information** can be found in chapter ["5.3. Ordering chart flow regulator, screwable and pluggable" on page 8.](#)

4.2. Quick exhaust valve


Properties:


Quick exhaust valve that shortens the exhaust time for pneumatic linear and rotary actuators

Features:

- For direct mounting at consumer side
- Short venting path
- Fast cylinder movement

Circuit function:

If inlet P is pressurised, the pressure reaches outlet A. The ventilation R is locked. In the event of overpressure in A compared to P, A is vented to R.



Further information regarding the **general technical data** can be found in chapter ["1.2. Quick exhaust valve" on page 4.](#)

Further information regarding **ordering information** can be found in chapter ["5.4. Ordering chart quick exhaust valve" on page 16.](#)

4.3. Restrictor and restrictor silencer


Properties:

Restrictor silencer to reduce the noise level and restrict the discharged compressed air in pneumatic valves

Features:

- For direct mounting on appliance
- With integrated silencer
- Compact construction

Further information regarding the **general technical data** can be found in chapter ["1.3. Restrictor and restrictor silencer" on page 4](#).

Further information regarding **ordering information** can be found in chapter ["5.5. Ordering chart restrictor and restrictor silencer" on page 17](#).

4.4. Shuttle valve


Properties:


The shuttle valve makes it possible to control a device from two different supply locations. The valve body is made from aluminium

Features:

- Aluminium body

Circuit function:

The pressurised port P1 or P2 is connected to A, while the other inlet is blocked. If both ports are subject to pressure, the higher pressure is guided to the outlet.


Flow rate Q_N value air:

Measured at + 20 °C, 6 bar¹⁾ pressure at the valve inlet and 1 bar differential pressure

Fluid connection	Q_N value air	Pressure range ¹⁾
	[l/min]	[bar]
G 1/8	200	2...10
G 1/4	200	2...10

1.) Pressure data: overpressure to atmospheric pressure

Further information regarding the **general technical data** can be found in chapter ["1.4. Shuttle valve" on page 5](#).

Further information regarding **ordering information** can be found in chapter ["5.3. Ordering chart flow regulator, screwable and pluggable" on page 8](#).

5. Ordering information

5.1. Bürkert eShop


Bürkert eShop – Easy ordering and quick delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

5.2. Bürkert product filter



Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.


[Try out our product filter](#)


5.3. Ordering chart flow regulator, screwable and pluggable


Restrictor valve

Dimensions	Material	Medium	F	Diameter	L	L1	L2	Packaging unit	Article no.
				[mm]	[mm]	[mm]	[mm]	[pieces]	
	Nickel-plated brass	Air	M5	4	24	20.2	13.2	1	780217
			G 1/8	4	29.8	21.3	19.3	1	780218
			G 1/8	6	29.8	23	21.3	1	780219
			G 1/4	6	35.4	24.5	22.6	1	780220
			G 1/8	8	29.8	24.8	23.6	1	780221
			G 1/4	8	35.4	26.5	24.8	1	780222
			G 1/4	10	35.4	31.4	27.6	1	780223


Dimensions	Material	Medium	F	Threaded connection F1	L	L1	L2	Packaging unit	Article no.
					[mm]	[mm]	[mm]	[pieces]	
	Nickel-plated brass	Air, neutral gases	G 1/8	G 1/8	30.9	21.4	15.8	1	780228
			G 1/4	G 1/4	37	25.5	19.1	1	780229


Dimensions	Material	Medium	F	Diameter	L	L1	Packaging unit	Article no.
				[mm]				
 	Stainless steel AISI 316/1.4401	Air, neutral gases	1/8"	6	42	24	1	771636 
			1/4"	6	50	27	1	771637 
			1/8"	8	42	24	1	771638 
			1/4"	8	50	27	1	771639 
			3/8"	10	57	31	1	771640 
			1/2"	12	70	34	1	771641 

Dimensions	Material	Medium	F	F1	L	L1	Packaging unit	Article no.
					[mm]	[mm]		
 	Stainless steel AISI 316/1.4401	Air, neutral gases	1/8"	1/8"	42	20	1	771643 
			1/4"	1/4"	50	25	1	770177 
			3/8"	3/8"	57	28	1	771644 
			1/2"	1/2"	70	31	1	771645 


Dimensions	Material	Medium	F	Diameter	L	L1	L2	Packaging unit	Article no.
				[mm]					
 	PBT	Air, neutral gases	M5	4	27.7	19.1	13.5	1	783394 
			1/8"	4	33.5	21	18.9	1	783395 
			M5	6	27.7	20.8	13.5	1	783396 
			1/8"	6	33.5	22.3	18.9	1	783398 
			1/4"	6	38.8	24.3	23	1	783397 
			1/8"	8	33.5	25.6	18.9	1	783400 
			1/4"	8	38.8	27.2	23	1	783399 
			1/4"	10	38.8	28.6	23	1	783401 
			3/8"	10	47.2	30.3	26.9	1	783402 
			1/4"	12	38.8	31	23	1	783403 
			3/8"	12	47.2	32.4	26.9	1	783404 
			1/2"	12	53	34	31.1	1	783405 


Restrictor valve, block design


Dimensions	Material	Medium	F	Diameter	L	L1	L2	Packaging unit	Article no.
				[mm]	[mm]	[mm]	[mm]	[pieces]	
	Aluminium	Air	M5	4.2	21	12.5	15	1	783365 
			G 1/8	4.2	31	18.2	25	1	783366 
			G 1/4	6.5	45	24.5	35	1	783367 
			G 3/8	6.5	50	25.5	35	1	783368 
			G 1/2	6.5	59	35	44	1	783369 


Dimensions	Material	Medium	F	Diameter	L	L1	L2	Packaging unit	Article no.
				[mm]	[mm]	[mm]	[mm]	[pieces]	
	Stainless steel AISI 316/ 1.4401	Air, neutral gases	1/8"	4.2	32	17	22	1	771463 
			1/4"	6.5	55	24	31.8	1	771464 
			3/8"	6.5	55	24	31.8	1	771465 
			1/2"	6.5	64	33	35	1	771466 

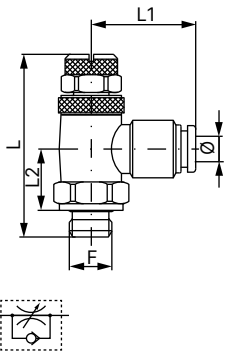
One-way flow restrictor (exhaust air)

Dimensions	Material	Medium	F	Diameter	L	L1	L2	Packaging unit	Article no.
				[mm]	[mm]	[mm]	[mm]	[pieces]	
	Nickel-plated brass	Air	M5	4	28	24	10.5	1	780204 
			G 1/8	4	37	25	18.5	1	780205 
			G 1/8	6	37	26	18.5	1	780206 
			G 1/4	6	50	28	24	1	780207 
			G 1/8	8	37	31	18.5	1	780208 
			G 1/4	8	50	31	24	1	780209 
			G 1/4	10	50	36	24	1	780210 


Dimensions	Material	Medium	F	F1	L [mm]	L1 [mm]	L2 [mm]	Packaging unit [pieces]	Article no.
	Nickel-plated brass	Air, neutral gases	1/8"	1/8"	42	21.4	19.7	1	783406 𐀀
			1/4"	1/4"	48	25.5	24	1	783407 𐀀
			3/8"	3/8"	53	31.5	28	1	783408 𐀀


Dimensions	Material	Medium	F	Diameter [mm]	L [mm]	L1 [mm]	Packaging unit [pieces]	Article no.
	Stainless steel AISI 316/ 1.4401	Air, neutral gases	1/8"	6	42	24	1	771753 𐀀
			1/4"	6	50	27	1	771754 𐀀
			1/8"	8	42	24	1	771755 𐀀
			1/4"	8	50	27	1	771756 𐀀
			3/8"	10	57	31	1	771757 𐀀
			1/2"	12	70	34	1	771758 𐀀

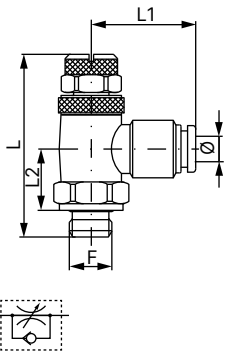
Dimensions	Material	Medium	F	F1	L [mm]	L1 [mm]	Packaging unit [pieces]	Article no.
	Stainless steel AISI 316/1.4401	Air, neutral gases	1/8"	1/8"	42	20	1	771760 𐀀
			1/4"	1/4"	50	25	1	771761 𐀀
			3/8"	3/8"	57	28	1	771762 𐀀
			1/2"	1/2"	60	31	1	771763 𐀀

Dimensions	Material	Medium	F	Diameter	L	L1	L2	Packaging unit	Article no.
				[mm]	[mm]	[mm]	[mm]	[pieces]	
	PBT	Air, neutral gases	M5	4	29.5	18.2	17.6	10	771807
			1/8"	4	35.4	19.4	16.1	10	771808
			1/4"	4	42.6	24	18.6	10	771809
			M5	6	29.5	18.2	17.8	10	771810
			1/8"	6	35.4	19.4	17	10	771811
			1/4"	6	42.6	24	19.6	10	771812
			1/8"	8	35.4	19.4	17.7	10	771813
			1/4"	8	42.6	24	20.2	10	771814
			3/8"	8	48	26.3	21.7	5	771815
			1/4"	10	42.6	25.5	22.8	10	771816
			3/8"	10	48	26.3	23.7	5	771817
			3/8"	12	48	27.3	25.5	5	771818
			1/2"	12	53.5	29.1	28.6	5	771819


One-way flow restrictor (inlet air)

Dimensions	Material	Medium	F	Diameter	L	L1	L2	Packaging unit	Article no.
				[mm]	[mm]	[mm]	[mm]	[pieces]	
	Nickel-plated brass	Air, neutral gases	G 1/8	4	37	25	18.5	1	780211
			G 1/8	6	37	26	18.5	1	780212
			G 1/4	6	50	28	24	1	780213
			G 1/8	8	37	31	18.5	1	780214
			G 1/4	8	50	31	24	1	780215
			G 1/4	10	50	36	24	1	780216

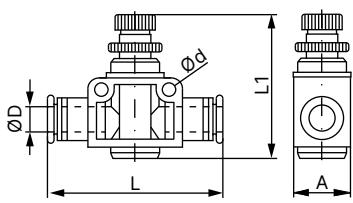
Dimensions	Material	Medium	F	F1	L	L1	L2	Packaging unit	Article no.
					[mm]	[mm]	[mm]	[pieces]	
	Nickel-plated brass	Air, neutral gases	1/8"	1/8"	42	21.4	19.7	1	783409
			1/4"	1/4"	48	25.5	24	1	783410
			3/8"	3/8"	53	31.5	28	1	783411

Dimensions	Material	Medium	F	Diameter	L	L1	L2	Packaging unit	Article no.
				[mm]	[mm]	[mm]	[mm]	[pieces]	
	PBT	Air, neutral gases	M5	4	29.5	18.2	17.6	10	771764
			1/8"	4	35.4	19.4	16.1	10	771765
			1/4"	4	42.6	24	18.6	10	771766
			M5	6	29.5	18.2	17.8	10	771767
			1/8"	6	35.4	19.4	17	10	771768
			1/4"	6	42.6	24	19.6	10	771769
			1/8"	8	35.4	19.4	17.7	10	771770
			1/4"	8	42.6	24	20.2	10	771771
			3/8"	8	48	26.3	21.7	5	771772
			1/4"	10	42.6	25.5	22.8	10	771773
			3/8"	10	48	26.3	23.7	5	771774
			3/8"	12	48	27.3	25.5	5	771775
			1/2"	12	53.5	29.1	28.6	5	771776

One-way flow restrictor, block design

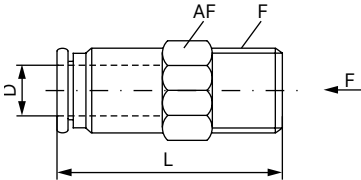
Dimensions	Material	Medium	F	Diameter	L	L1	L2	Packaging unit	Article no.
				[mm]	[mm]	[mm]	[mm]	[pieces]	
	Aluminium	Air	M5	4.2	21	12.5	15	1	783360
			G 1/8	4.2	31	18.2	25	1	783361
			G 1/4	6.5	45.0	24.5	35	1	783362
			G 3/8	6.5	50	25.5	35	1	783363
			G 1/2	6.5	59	35	44	1	783364
	Stainless steel AISI 316/ 1.4401	Air, neutral gases	1/8"	4.2	32	17	22	1	771459
			1/4"	6.5	55	24	31.8	1	771460
			3/8"	6.5	55	24	31.8	1	771461
			1/2"	6.5	64	33	35	1	771462

One-way flow restrictor, pluggable, block design, one-way control

Dimensions	Material	Medium	Diame- ter D	Diameter d	L	L1	A	Packag- ing unit	Article no.
			[mm]	[mm]	[mm]	[mm]	[mm]	[pieces]	
	Plastic	Air	4	3.2	40	29	11	1	783415
			6	4.3	47	44	15	1	783416
			8	4.3	52	47.8	18	1	783417
			10	4.3	62.8	53.2	21	1	783418
			12	4.3	74	57	28	1	783419

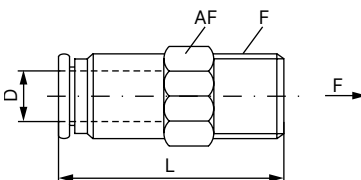
1.) Pressure data: overpressure to atmospheric pressure

Check valve with external thread and plug connection, flow from F to D

Dimensions	Material	Medium	Pressure $P_{\max}^{1)}$ [bar]	Medium temperature [°C]	F	Diameter D	L	AF	Packag- ing unit	Article no.
						[mm]	[mm]	[mm]	[pieces]	
	Nickel-plated brass	Air	0.9...10	0 ± 60	M5	4	30	10	1	783425 𐀀
					G 1/8	4	24.7	10	1	783426 𐀀
					G 1/8	6	28.6	12	1	783427 𐀀
					G 1/8	8	30.5	14	1	783428 𐀀
					G 1/4	6	28.6	14	1	783429 𐀀
					G 1/4	8	35.1	14	1	783430 𐀀

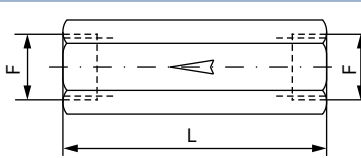
1.) Pressure data: overpressure to atmospheric pressure

Check valve with external thread and plug connection, flow from D to F

Dimensions	Material	Medium	Pressure $P_{\max}^{1)}$ [bar]	Medium temperature [°C]	F	Diameter D	L	AF	Packag- ing unit	Article no.
						[mm]	[mm]	[mm]	[pieces]	
	Nickel-plated brass	Air	0.9...10	0 ± 60	M5	4	30	10	1	783434 𐀀
					G 1/8	4	24.7	10	1	783435 𐀀
					G 1/8	6	28.6	12	1	783436 𐀀
					G 1/8	8	30.5	14	1	783437 𐀀
					G 1/4	6	28.6	14	1	783438 𐀀
					G 1/4	8	35.1	14	1	783439 𐀀


1.) Pressure data: overpressure to atmospheric pressure

Check valve with internal thread

Dimensions	Material	Medium	Pressure $P_{\max}^{1)}$ [bar]	Medium temperature [°C]	Opening pressure	F	L	Packag- ing unit	Article no.
							[mm]	[pieces]	
	Nickel-plated brass	Air	10	Max. + 70	0.05	G 1/8	34	1	783455 𐀀
						G 1/4	39	1	783456 𐀀

1.) Pressure data: overpressure to atmospheric pressure

Check valve with plug connection


Dimensions	Material	Medium	Pressure $P_{\max}^{1)}$ [bar]	Medium temperature [°C]	Diameter D	Diameter D1	L	Packag- ing unit	Article no.
							[mm]	[pieces]	
	Plastic	Air	0.9...10	+ 50	4	10	41.1	1	783420 𐀀
					6	12.4	47.2	1	783421 𐀀
					8	14.4	51.6	1	783422 𐀀


1.) Pressure data: overpressure to atmospheric pressure

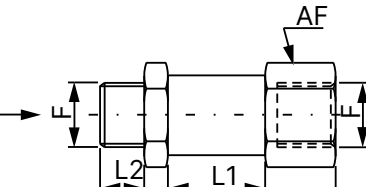
Check valves with other types of connection


Material	Medium	Pressure	Opening pressure ^{1.)} [bar]	Medium temperature [°C]	Packaging unit [pieces]
Untreated brass	Air	PN 10	0.1	Max. 70	1

1.) Pressure data: overpressure to atmospheric pressure

Dimensions	F	L [mm]	L1 [mm]	L2 [mm]	AF [mm]	Article no.
 →: Flow direction	G ¼	48.5	15.5	9	17	783443 
	G ⅜	54	15	11.5	19	783444 
	G ½	on request	on request	on request	24	783445 

Dimensions	F	L [mm]	L1 [mm]	L2 [mm]	AF [mm]	Article no.
 →: Flow direction	G ¼	48.5	20.5	8	17	783446 
	G ⅜	54	23	10	19	783447 
	G ½	64	30	12	24	783448 

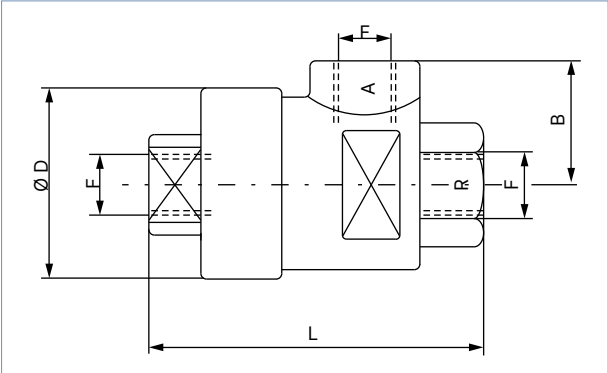
Dimensions	F	L [mm]	L1 [mm]	L2 [mm]	AF [mm]	Article no.
 →: Flow direction	G ¼	48.5	20.5	9	17	783449 
	G ⅜	54	23	11	19	783450 
	G ½	on request	on request	on request	on request	783451 

Dimensions	F	L [mm]	L1 [mm]	L2 [mm]	AF [mm]	Article no.
 →: Flow direction	G ¼	48.5	20.5	9	17	783452 
	G ⅜	on request	on request	on request	19	783453 
	G ½	65.5	30	14	24	783454 

5.4. Ordering chart quick exhaust valve

Nickel-plated brass variant

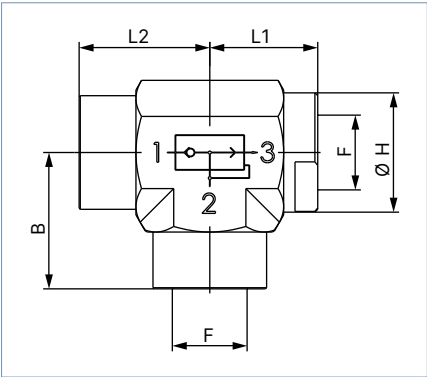
Note:
Dimensions in mm



Port connection	Pressure range	F	B	Ø D	L	Article no.
	[bar]	[mm]	[mm]	[mm]	[mm]	
G 1/8	0.5...12	G 1/8	19.5	28	42	783709
G 1/4	0.5...12	G 1/4	25	34.5	54	783710
G 3/8	0.5...12	G 3/8	26.5	38	60.5	772886
G 1/2	0.5...12	G 1/2	32	43	72	783711
G 3/4	0.5...12	G 3/4	37	48.5	88	771047
G 1	0.5...12	G 1	48	75.5	109	771048
M5	0.5...12	M5	10	20	25	772885

Stainless steel variant


Note:
Dimensions in mm




Port connection	Q _N value air P→A	Q _N value air A→R	Pressure range	F	B	H	L1	L2	Article no.
	[l/min]	[l/min]	[bar]	[mm]	[mm]	[mm]	[mm]	[mm]	
G 1/8	650	1100	0.5...40	G 1/8	23	17	16.5	21	771467
G 1/4	1290	27	0.5...40	G 1/4	23	17	16.5	21	771468
G 3/8	1810	3810	0.5...40	G 3/8	26	22	19	25.5	771469
G 1/2	3810	5490	0.5...40	G 1/2	32.5	27	23	31	771470

5.5. Ordering chart restrictor and restrictor silencer


Restrictor silencer, brass

Dimensions	A	F	L	H	Packaging unit	Article no.
		[mm]	[mm]	[mm]	[pieces]	
	G 1/8	6	20...22	26...28	1	783316 
	G 1/4	8	22...24	30...32	1	783317 
	G 3/8	10	25...28	35...38	1	783318 
	G 1/2	11	26...29	36...39	1	783319 
	G 3/4	12	32...37	45...50	1	783320 
	G 1	12	32...37	45...50	1	783321 


Restrictor silencer, brass, cylindrical

Dimensions	A	F	L	H	Packaging unit	Article no.
			[mm]	[mm]	[pieces]	
	M5	3.5	13...18	16...21	1	783322 
	G 1/8	8	30...36	38...44	1	783323 
	G 1/4	9	30...36	39...45	1	783324 
	G 3/8	10	33...50	43...60	1	783325 
	G 1/2	11	33...50	48...61	1	783326 
	G 3/4	11	56...80	68...92	1	783327 
	G 1	11	56...80	68...92	1	783328 

Restrictor, nickel-plated brass, with exhaust air connection

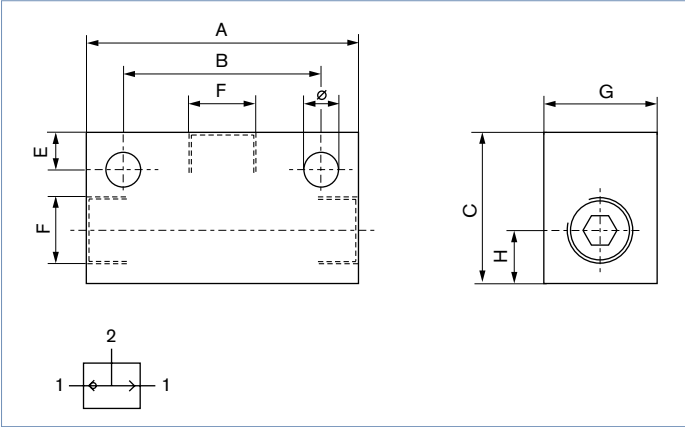
Dimensions	A	B	Packaging unit	Article no.
		[mm]		
	G 1/8	G 1/8	10	783329 
	G 1/4	G 1/8	10	783330 
	G 3/8	G 1/4	1	783331 
	G 1/2	G 1/4	1	783332 

Restrictor, nickel-plated brass, free bleed-off

Dimensions	A	L	Packaging unit	Article no.
		[mm]	[pieces]	
	G 1/8	22	10	783333 
	G 1/4	18	10	783334 

5.6. Ordering chart shuttle valve

Note:
Dimensions in mm



Ø	Fluidic connection F	A	C	G	H	E	B	Article no.
[mm]		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
4.5	G 1/8	36	20	15	7.5	4	25	783708
4.5	G 1/4	43	25	20	8.5	6.5	25	787732