



Fitting connectors

- M5 ... G 2 1/2"
- Nickel-plated brass, stainless steel, plastic, aluminium

Product variants described in the data sheet may differ from the product presentation and description.

Type description

Includes:

Standard fittings

- double nipple
- detachable double nipple
- reducers
- reducer sleeves
- extension nipple
- extensions
- sleeves
- angled fittings
- dummy plug
- hose connectors
- blanking nut
- T-connector
- four-way junction screw fittings

Screwed fittings

- bulkhead fittings
- pressure gauge fittings
- elbows
- T-shaped tube hose fitting
- T-shaped fittings
- union nut
- tube hose fittings
- ring connectors
- seal rings
- distribution manifold
- four-way distributor blocks
- flow manifold

Table of contents

1. General technical data	4
2. Approvals and conformities	4
2.1. General notes	4
2.2. Conformity	4
2.3. Standards	4
3. Materials	4
3.1. Bürkert resistApp	4
4. Dimensions	5
5. Ordering information	5
5.1. Bürkert eShop	5
5.2. Bürkert product filter	5
5.3. Ordering chart standard fittings	5
Overview standard fittings	5
Double nipple, cylindrical, without O-ring, UNI-ISO 228/1, nickel-plated brass	6
Double nipple, cylindrical, without O-ring, UNI-ISO 228/1, stainless steel 1.4571	6
Double nipple, conical, UNI-ISO 7/1	6
Double nipple, detachable, male, UNI-ISO 7/1, brass	7
Double nipple, detachable, male, UNI-ISO 7/1, stainless steel 1.4571	7
Reducer, cylindrical, UNI-ISO 228/1, nickel-plated brass	7
Reducer, cylindrical, UNI-ISO 228/1, stainless steel 1.4571	7
Reducer, conical UNI-ISO 228/1, UNI-ISO 7/1	8
Reducer sleeve, UNI-ISO 228/1	8
Extension nipple, conical, UNI-ISO 228/1, UNI-ISO 7/1	8
Extension nipple, cylindrical, without O-ring, UNI-ISO 228/1	8
Extension, UNI-ISO 228/1	9
Sleeves, UNI-ISO 7/1	9
Sleeves, UNI-ISO 228/1	9
Elbow, female, UNI-ISO 228/1	9
Elbow, male-female, UNI-ISO 228/1	10
Dummy plug without O-ring, UNI-ISO 228/1, stainless steel 1.4571	10
Dummy plug with O-ring, UNI-ISO 228/1	10
Hose connectors with O-ring, UNI-ISO 228/1	10
Lock nuts, UNI-ISO 228/1	11
T-piece, female, UNI-ISO 228/1	11
T-piece, central and lateral male, UNI-ISO 228/1	11
Crosspiece, female, UNI-ISO 228/1	12
5.4. Ordering chart screw fittings	12
Overview screw fittings	12
Straight screwed fittings	12
Straight screwed fittings with O-ring	13
Bulkhead fittings, nickel-plated brass	13
Bulkhead fittings, plastic	13
Pressure gauge fittings	13
Elbow, male, conical, UNI-ISO 7/1, plastic	14
Elbow, male, conical, UNI-ISO 7/1, nickel-plated brass	14
Elbow, female	14
T-piece with hose fitting	14
T-screwing, central male, conical, UNI-ISO 7/1	15
Union nut	15
Hose connections with nut	15

Banjo bolt, single with 2 seals 15

Banjo bolt, double with 3 seals 15

Single banjo body 16

Double banjo body 16

Seal rings 16

Distribution manifold, 3-fold 16

Distribution manifold, 8-fold 17

Four-way distributor block 17

Flow manifold 17

DTS 1000112007 EN Version: H Status: RL (released | freigegeben | validé) printed: 08.04.2025

1. General technical data

Product properties

Dimensions Further information can be found in chapter "5. Ordering information" on page 5.

Performance data

Maximum nominal pressure ¹⁾

Nickel-plated brass

Standard fittings	60 bar (except double nipple 3-pc and plug)
Detachable double nipple and dummy plug	16 bar
Screw fittings	18 bar

Stainless steel

Standard fittings	40 bar (except double nipple 3-pc)
Double nipple 3-pc	16 bar

Plastic

Screw fittings	10 bar (except elbow, seal rings and distributor blocks)
Elbow, seal rings	18 bar
Distributor block	13 bar

Aluminium

Seal rings	18 bar
Distribution and flow manifold	16 bar

1.) Pressure data: overpressure to atmospheric pressure

2. Approvals and conformities

2.1. General notes

- The approvals and conformities listed below must be stated when making enquiries. This is the only way to ensure that the product complies with all required specifications.
- Not all available variants can be supplied with the below mentioned approvals or conformities.

2.2. Conformity

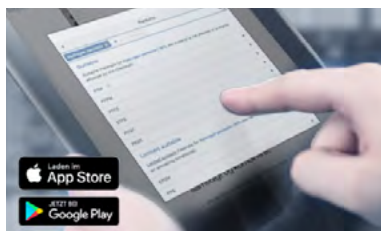
In accordance with the Declaration of Conformity, the product is compliant with the EU Directives.

2.3. Standards

The applied standards which are used to demonstrate compliance with the EU Directives are listed in the EU-Type Examination Certificate and/or the EU Declaration of Conformity.

3. Materials

3.1. Bürkert resistApp



Bürkert resistApp – Chemical resistance chart

You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.

[Start chemical resistance check](#)

4. Dimensions

Further information can be found in chapter “5. Ordering information” on page 5.

5. Ordering information

5.1. Bürkert eShop



Bürkert eShop – Easy ordering and quick delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

5.2. Bürkert product filter



Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.


[Try out our product filter](#)

5.3. Ordering chart standard fittings


Overview standard fittings

- Double nipple
- Detachable double nipple
- Reducers
- Reducer sleeves
- Extension nipple
- Extensions
- Sleeves
- Elbow
- Dummy plug
- Hose connectors
- Lock nut
- T-piece
- Crosspiece


Double nipple, cylindrical, without O-ring, UNI-ISO 228/1, nickel-plated brass

Dimensions	Material	Max. nominal pressure [bar]	F	F1	L	Packaging unit	Article no.
					[mm]	[pieces]	
	Nickel-plated brass	60	M5	M5	11.5	10	782000 
			M5	G 1/8	14.5	10	782001 
			G 1/8	G 1/8	17	10	780123 
			G 1/8	G 1/4	19	10	780124 
			G 1/8	G 3/8	20	10	780125 
			G 1/4	G 1/4	21	10	780126 
			G 1/4	G 3/8	22	10	780127 
			G 1/4	G 1/2	24	10	780128 
			G 3/8	G 3/8	24	10	780129 
			G 3/8	G 1/2	24	10	780130 
			G 1/2	G 1/2	26.5	10	780131 
			G 1/2	G 3/4	27	10	782002 
			G 3/4	G 3/4	28	10	782003 


Double nipple, cylindrical, without O-ring, UNI-ISO 228/1, stainless steel 1.4571

Dimensions	Material	Max. nominal pressure [bar]	F	F1	L	Packaging unit	Article no.
					[mm]	[pieces]	
	Stainless steel 1.4571	40	M5	M5	15	1	787843 
			G 1/8	G 1/8	18	1	787844 
			G 1/4	G 1/4	23	1	787845 
			G 3/8	G 3/8	23	1	787846 
			G 1/2	G 1/2	30	1	787847 
			G 3/4	G 3/4	33	1	787848 
			G 1	G 1	50	1	787849 
			G 1 1/4	G 1 1/4	58	1	787850 
			G 1 1/2	G 1 1/2	61	1	787851 
			G 2	G 2	61	1	787852 


Double nipple, conical, UNI-ISO 7/1

Dimensions	Material	Max. nominal pressure [bar]	F	F1	L	Packaging unit	Article no.
					[mm]	[pieces]	
	Nickel-plated brass	60	R 1/8	R 1/8	21	10	782006 
			R 1/8	R 1/4	24	10	782007 
			R 1/8	R 3/8	25	10	782008 
			R 1/4	R 1/4	27	10	782009 
			R 1/4	R 3/8	28	10	782010 
			R 1/4	R 1/2	32	10	782011 
			R 3/8	R 3/8	29	10	782012 
			R 3/8	R 1/2	32.5	10	782013 
			R 1/2	R 1/2	35	10	782014 
			R 1/2	R 3/4	37.5	10	782015 
			R 3/4	R 3/4	40.5	10	782016 


Double nipple, detachable, male, UNI-ISO 7/1, brass

Dimensions	Material	Max. nominal pressure [bar]	F	F1	L	Packaging unit	Article no.
					[mm]	[pieces]	
	Brass	16	R 1/8	R 1/8	27	10	782090 
			R 1/4	R 1/4	34	10	782091 
			R 3/8	R 3/8	36	10	782092 
			R 1/2	R 1/2	44	1	782093 
			R 3/4	R 3/4	52	1	782094 
			R 1	R 1	65	1	782095 
			R 1/8	R 1/4	30	10	782096 
			R 1/4	R 3/8	35	10	782097 


Double nipple, detachable, male, UNI-ISO 7/1, stainless steel 1.4571

Dimensions	Material	Max. nominal pressure [bar]	F	F1	L	Packaging unit	Article no.
					[mm]	[pieces]	
	Stainless steel 1.4571	16	R 1/8	R 1/8	27	1	787853 
			R 1/4	R 1/4	35	1	787854 
			R 3/8	R 3/8	36	1	787855 
			R 1/2	R 1/2	44	1	787856 
			R 3/4	R 3/4	75	1	787857 
			R 1	R 1	90	1	787858 
			R 1 1/2	R 1 1/2	110	1	787859 
			R 2	R 2	120	1	787860 


Reducer, cylindrical, UNI-ISO 228/1, nickel-plated brass

Dimensions	Material	Max. nominal pressure [bar]	F	F1	L	Packaging unit	Article no.
					[mm]	[pieces]	
	Nickel-plated brass	60	G 1/8	M5	10.5	10	781843 
			G 1/4	G 1/8	13	10	780136 
			G 3/8	G 1/8	14	10	780137 
			G 3/8	G 1/4	14	10	780138 
			G 1/2	G 1/4	15.5	10	780139 
			G 1/2	G 3/8	15.5	10	780140 


Reducer, cylindrical, UNI-ISO 228/1, stainless steel 1.4571

Dimensions	Material	Max. nominal pressure [bar]	F	F1	L	Packaging unit	Article no.
					[mm]	[pieces]	
	Stainless steel 1.4571	40	G 1/4	G 1/8	11	1	787861 
			G 3/8	G 1/4	14	1	787862 
			G 1/2	G 3/8	18	1	787863 
			G 3/4	G 1/2	24	1	787865 
			G 1	G 3/4	21	1	787866 


Reducer, conical UNI-ISO 228/1, UNI-ISO 7/1

Dimensions	Material	Max. nominal pressure [bar]	F	F1	L	Packaging unit	Article no.
					[mm]	[pieces]	
	Nickel-plated brass	60	R 1/4	G 1/8	16	10	782017 
			R 3/8	G 1/8	17	10	782018 
			R 3/8	G 1/4	17	10	782019 
			R 1/2	G 1/4	20	10	782020 
			R 1/2	G 3/8	20	10	782021 
			R 3/4	G 1/2	23	10	782022 


Reducer sleeve, UNI-ISO 228/1

Dimensions	Material	Max. nominal pressure [bar]	F	F1	L	Packaging unit	Article no.
					[mm]	[pieces]	
	Nickel-plated brass	60	G 1/8	G 1/4	21.5	10	782038 
			G 1/4	G 3/8	25.5	10	782040 
			G 1/4	G 1/2	28.5	10	782041 
			G 3/8	G 1/2	29.5	10	782042 


Extension nipple, conical, UNI-ISO 228/1, UNI-ISO 7/1

Dimensions	Material	Max. nominal pressure [bar]	F	F1	L	Packaging unit	Article no.
					[mm]	[pieces]	
	Nickel-plated brass	60	R 1/8	G 1/8	20	10	782023 
			R 1/8	G 1/4	22.5	10	782024 
			R 1/4	G 1/4	25	10	782025 
			R 1/4	G 3/8	28.5	10	782026 
			R 3/8	G 3/8	28.5	10	782027 
			R 3/8	G 1/2	32	10	782028 
			R 1/2	G 1/2	34	10	782029 


Extension nipple, cylindrical, without O-ring, UNI-ISO 228/1

Dimensions	Material	Max. nominal pressure [bar]	F	F1	L	Packaging unit	Article no.
					[mm]	[pieces]	
	Nickel-plated brass	60	M5	G 1/8	17	10	782030 
			G 1/8	G 1/8	18.5	10	782031 
			G 1/8	G 1/4	21.5	10	782032 
			G 1/4	G 1/4	22.5	10	782033 
			G 1/4	G 3/8	26	10	782034 
			G 3/8	G 3/8	26.5	10	782035 
			G 3/8	G 1/2	29.5	10	782036 
			G 1/2	G 1/2	29.5	1	782037 


Extension, UNI-ISO 228/1

Dimensions	Material	Max. nominal pressure	F	L	Packaging unit	Article no.
		[bar]		[mm]	[pieces]	
	Nickel-plated brass	60	G 1/8	22	10	782085 
			G 1/8	42	10	782086 
			G 1/8	51	10	782087 
			G 1/4	35	10	782088 
			G 1/4	51	10	782089 


Sleeves, UNI-ISO 7/1

Dimensions	Material	Max. nominal pressure	F	L	Packaging unit	Article no.
		[bar]		[mm]	[pieces]	
	Stainless steel 1.4408	40	Rp 1/8	18	1	787868 
			Rp 1/4	26	1	787869 
			Rp 3/8	26	1	787870 
			Rp 1/2	30	1	787871 
			Rp 3/4	35	1	787872 
			Rp 1	40	1	787873 
			Rp 1 1/4	48	1	787874 
			Rp 1 1/2	48	1	787875 
			Rp 2	56	1	787876 


Sleeves, UNI-ISO 228/1

Dimensions	Material	Max. nominal pressure	F	L	Packaging unit	Article no.
		[bar]		[mm]	[pieces]	
	Nickel-plated brass	60	M5	11	10	782004 
			G 1/8	15	10	780132 
			G 1/4	22	10	780133 
			G 3/8	24	10	780134 
			G 1/2	30	10	780135 


Elbow, female, UNI-ISO 228/1

Dimensions	Material	Max. nominal pressure	F Internal thread	L	Packaging unit	Article no.
		[bar]		[mm]	[pieces]	
	Nickel-plated brass	60	G 1/8	20.5	10	782047 
			G 1/4	26	10	782048 
			G 3/8	30	10	782049 
			G 1/2	36	1	782050 


Elbow, male-female, UNI-ISO 228/1

Dimensions	Material	Max. nominal pressure	F	L	L1	Packaging unit	Article no.
		[bar]		[mm]	[mm]	[pieces]	
	Nickel-plated brass	60	M5	11.0	11.5	10	788365 
			G 1/8	16.5	20.5	10	782051 
			G 1/4	24.5	26	10	782052 
			G 3/8	26	30	10	782053 
			G 1/2	30	36	1	782054 


Dummy plug without O-ring, UNI-ISO 228/1, stainless steel 1.4571

Dimensions	Material	Max. nominal pressure	F	L	Packaging unit	Article no.
		[bar]		[mm]	[pieces]	
	Stainless steel 1.4571	40	G 1/2	15	1	787816 
			G 3/4	11	1	787817 
			G 1/8	11	1	774721 
			G 1/4	13	1	774729 
			G 3/8	14	1	774732 
			G 1	22	1	787880 


Dummy plug with O-ring, UNI-ISO 228/1

Dimensions	Material	Max. nominal pressure	F	L	Packaging unit	Article no.
		[bar]		[mm]	[pieces]	
	Nickel-plated brass	16	M5	6.5	10	782005 
			M7	8.5	10	787054 
			G 1/8	8.5	10	780141 
			G 1/4	11	10	780142 
			G 3/8	12.5	10	780143 
			G 1/2	14.5	10	780144 

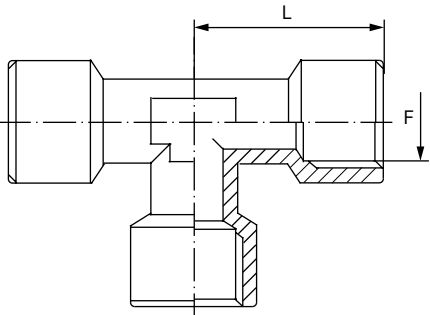
Hose connectors with O-ring, UNI-ISO 228/1

Dimensions	Material	Max. nominal pressure	F	Diameter	L	Packaging unit	Article no.
		[bar]		[mm]	[mm]	[pieces]	
	Nickel-plated brass	60	G 1/8	7	31	10	782070 
			G 1/4	7	33	10	782071 
			G 1/8	8	31	10	782072 
			G 1/8	9	31	10	782073 
			G 1/4	9	33	10	782074 
			G 3/8	9	34	10	782075 
			G 1/4	12	33	10	782076 
			G 3/8	12	34	10	782077 
			G 1/2	12	36	10	782078 
			G 3/8	17	34	10	782079 
			G 1/2	17	36	10	782080 


Lock nuts, UNI-ISO 228/1


Dimensions	Material	Max. nominal pressure	F	L	Packaging unit	Article no.
		[bar]			[pieces]	
	Nickel-plated brass	60	G 1/8	13	10	782043 
			G 1/4	15	10	782044 
			G 3/8	17.5	10	782045 
			G 1/2	20	10	782046 

T-piece, female, UNI-ISO 228/1


Dimensions	Material	Max. nominal pressure	F	L	Packaging unit	Article no.
		[bar]			[pieces]	
	Nickel-plated brass	60	G 1/8	20.5	10	782055 
			G 1/4	26	10	782056 
			G 3/8	30	1	782057 
			G 1/2	36	1	782058 

T-piece, central and lateral male, UNI-ISO 228/1

Dimensions	Material	Max. nominal pressure	F	L	L1	Packaging unit	Article no.
		[bar]				[pieces]	
	Nickel-plated brass	60	G 1/8	16.5	20.5	10	782059 
			G 1/4	24.5	26	10	782060 
			G 3/8	26	30	1	782061 
			G 1/2	30	36	1	782062 

Dimensions	Material	Max. nominal pressure	F	F1	L	L1	Packaging unit	Article no.
		[bar]					[pieces]	
	Nickel-plated brass	60	G 1/8	G 1/8	37	20.5	10	782063 
			G 1/4	G 1/4	50.5	26	10	782064 
			G 3/8	G 3/8	56	30	1	782065 
			G 1/2	G 1/2	66	36	1	782066 

Crosspiece, female, UNI-ISO 228/1

Dimensions	Material	Max. nominal pressure	F	L	Packaging unit	Article no.
		[bar]		[mm]	[pieces]	
	Nickel-plated brass	60	G 1/8	20.5	10	782067 
			G 1/4	26	1	782068 
			G 3/8	28	1	782069 

5.4. Ordering chart screw fittings

Overview screw fittings

- Screwed fittings
- Bulkhead fittings
- Pressure gauge fittings
- Elbow
- T-connector
- T-screwing
- Union nut
- Hose connection
- Banjo bolt
- Banjo body
- Seal rings
- Distribution manifold
- Four-way distributor blocks
- Flow manifold

Straight screwed fittings

Material	Max. nominal pressure	F	Packaging unit	Article no.
	[bar]		[pieces]	
PPS	10	G 1/4...28 1/8	1	787060 
PEEK		G 1/4...28 1/8	1	787061 
PP		G 1/4...28 1/8	1	787062 
PPS		G 1/4...28 1/16	1	787063 
PEEK		G 1/4...28 1/16	1	787064 
PP		G 1/4...28 1/16	1	787065 

Straight screwed fittings with O-ring

Dimensions	Material	Max. nominal pressure	F	Diameter	L	Packaging unit	Article no.
		[bar]				[pieces]	
	Nickel-plated brass	18	M5	4/2	23	10	780145
			M5	6/4	23	10	780146
			G 1/8	6/4	25	10	780147
			G 1/4	6/4	27	10	780148
			G 1/8	8/6	25	10	780149
			G 1/4	8/6	27	10	780150
			G 3/8	8/6	29	10	780151
			G 1/4	10/8	29	10	780152
			G 3/8	10/8	31	10	780153
			G 1/2	10/8	33	10	780154
			G 3/8	12/10	33	10	780155
			G 1/2	12/10	35	1	780156

Bulkhead fittings, nickel-plated brass

Dimensions	Material	Max. nominal pressure	Diameter	L	Packaging unit	Article no.
		[bar]			[pieces]	
	Nickel-plated brass	18	6/4	47	10	780165
			8/6	48	10	780166
			10/8	49	10	780167
			12/10	53	10	780168


Bulkhead fittings, plastic

Dimensions	Material	Max. nominal pressure	Diameter	L	Packaging unit	Article no.
		[bar]			[pieces]	
	Plastic	10	6/4	50	10	782197
			8/6	51	10	782198


Pressure gauge fittings

Dimensions	Material	Max. nominal pressure	Diameter	F	L	Packaging unit	Article no.
		[bar]				[pieces]	
	Nickel-plated brass	18	6/4	G 1/8	26.5	10	780157
			6/4	G 1/4	29.5	10	780158
			8/6	G 1/8	26.5	10	780159
			8/6	G 1/4	29	10	780160
			8/6	G 3/8	33	10	780161
			10/8	G 1/4	31	10	780162
			10/8	G 3/8	35	10	780163
			10/8	G 1/2	38	10	780164


Elbow, male, conical, UNI-ISO 7/1, plastic

Dimensions	Material	Max. nominal pressure	Diameter	F	L	L1	Packaging unit	Article no.
		[bar]	[mm]		[mm]	[mm]	[pieces]	
	Plastic	18	6/4	R 1/8	16	23	10	782209 
			6/4	R 1/4	19	24	10	782211 
			8/6	R 1/4	20	25	10	782212 


Elbow, male, conical, UNI-ISO 7/1, nickel-plated brass

Dimensions	Material	Max. nominal pressure	Diameter	F	L	L1	Packaging unit	Article no.
		[bar]	[mm]		[mm]	[mm]	[pieces]	
	Nickel-plated brass	18	5/3	R 1/8	17	21.5	10	782163 
			6/4	R 1/8	17	22	10	782164 
			8/6	R 1/8	17	22	10	782165 
			6/4	R 1/4	20	22	10	782166 
			8/6	R 1/4	20	22	10	782167 
			10/8	R 1/4	21	25	10	782168 
			8/6	R 3/8	22	23	10	782169 
			10/8	R 3/8	22	25	10	782170 
			12/10	R 3/8	24	31	10	782171 
			10/8	R 1/2	26	28.5	10	782172 
			12/10	R 1/2	14	26	1	782173 


Elbow, female

Dimensions	Material	Max. nominal pressure	Diameter	F	L	L1	Packaging unit	Article no.
		[bar]	[mm]		[mm]	[mm]	[pieces]	
	Nickel-plated brass	18	6/4	G 1/8	21	22	10	782174 
			8/6	G 1/4	24	23	10	782175 


T-piece with hose fitting

Dimensions	Material	Max. nominal pressure	Diameter	L	Packaging unit	Article no.
		[bar]	[mm]			
	Nickel-plated brass	18	6/4	22	10	780169 
			8/6	22	10	780170 
			10/8	25	10	780171 
			12/10	31	1	780172 


T-screwing, central male, conical, UNI-ISO 7/1

Dimensions	Material	Max. nominal pressure	Diameter	F	L	L1	Packaging unit	Article no.
		[bar]					[pieces]	
	Nickel-plated brass	18	5/3	R 1/8	17	21.5	10	782176 
			6/4	R 1/8	17	22	10	782177 
			6/4	R 1/4	20	22	10	782179 
			8/6	R 1/8	17	22	10	782178 
			8/6	R 1/4	20	22	10	782180 
			8/6	R 3/8	22	23	10	782182 
			10/8	R 1/4	21	25	10	782181 
			10/8	R 3/8	22	25	10	782183 
			10/8	R 1/2	26	28.5	1	782185 
			12/10	R 1/2	24	31	1	782186 
			12/10	R 3/8	26	31	1	782184 


Union nut

Dimensions	Material	Max. nominal pressure	Diameter	F	L	Packaging unit	Article no.
		[bar]				[pieces]	
	Nickel-plated brass	18	4/2	M7 × 0.5	9	10	780173 
			6/4-M5	M8 × 0.5	9	10	780174 
			6/4	M10 × 1	11	10	780175 
			8/6	M12 × 1	11	10	780176 
			10/8	M14 × 1	12	10	780177 
			12/10	M16 × 1	12	10	780178 


Hose connections with nut

Dimensions	Material	Max. nominal pressure	Diameter	Packaging unit	Article no.
		[bar]			
	POM	10	6/4	10	782221 
			8/6	10	782222 


Banjo bolt, single with 2 seals

Dimensions	Material	Medium	F	L	Packaging unit	Article no.
				[mm]	[pieces]	
	Nickel-plated brass	Air	M5	18	10	780053 
			G 1/8	28	10	780054 
			G 1/4	33	10	780055 
			G 3/8	37	10	780056 
			G 1/2	42	1	780057 


Banjo bolt, double with 3 seals

Dimensions	Material	Medium	F	L	Packaging unit	Article no.
				[mm]	[pieces]	
	Nickel-plated brass	Air	G 1/8	44.5	10	780058 
			G 1/4	51.5	10	780059 
			G 3/8	58.5	10	780060 
			G 1/2	67.5	1	780061 

Single banjo body

Dimensions	Material	Max. nominal pressure	Diameter	F	L	Packaging unit	Article no.
		[bar]				[pieces]	
	Nickel-plated brass	18	4/2	M5	20.5	10	780179 
			6/4	M5	20.5	10	780180 
			6/4	G 1/8	24.5	10	780181 
			6/4	G 1/4	26.5	10	780182 
			8/6	G 1/8	24	10	780183 
			8/6	G 1/4	26	10	780184 
			8/6	G 3/8	28.5	10	780185 
			10/8	G 1/4	28	10	780186 
			10/8	G 3/8	29	10	780187 
			10/8	G 1/2	30.5	10	780188 
			12/10	G 1/2	33.5	1	780189 


Double banjo body

Dimensions	Material	Max. nominal pressure	Diameter	F	L	Packaging unit	Article no.
		[bar]				[pieces]	
	Nickel-plated brass	18	6/4	G 1/8	24.5	10	780190 
			6/4	G 1/4	26.5	10	780191 
			8/6	G 1/8	25	10	780192 
			8/6	G 1/4	26	10	780193 
			8/6	G 3/8	28.5	10	780194 
			10/8	G 1/4	27.5	10	780195 
			10/8	G 3/8	29	10	780196 
			10/8	G 1/2	30.5	10	780197 
			12/10	G 1/2	33.5	10	780198 


Seal rings

Dimensions	Material	Max. nominal pressure	Diameter	D	Packaging unit	Article no.
		[bar]			[pieces]	
	Aluminium	18	1/8	13.8	10	780200 
			1/4	17.8	10	780201 
			3/8	21	10	780202 
			1/2	26	10	780203 
	Plastic	18	M5	9	10	780199 


Distribution manifold, 3-fold

Dimensions	Material	Max. nominal pressure	G	L	Packaging unit	Article no.
		[bar]			[pieces]	
	Aluminium	16	M5	40	1	787881 
			G 1/8	56	1	787882 
			G 1/4	89	1	787883 
			G 3/8	85	1	787884 
			G 1/2	105	1	787885 



Distribution manifold, 8-fold

Dimensions	Material	Max. nominal pressure	G	G1	L	Packaging unit	Article no.
		[bar]				[pieces]	
	Aluminium	16	G 1/4	M5	65	1	787886 
			G 3/8	1/8	114	1	787887 
			G 1/2	1/4	144	1	787888 
			G 3/4	1/2	170	1	787889 

Four-way distributor block

Dimensions	Material	Max. nominal pressure	F	Diameter	L	Packaging unit	Article no.
		[bar]				[pieces]	
	Plastic body, brass-threaded inserts	13	G 1/8	4.5	31	1	782081 
			G 1/4	5.5	40	1	782082 
			G 3/8	5.5	50	1	782083 
			G 1/2	5.5	50	1	782084 

Flow manifold

Dimensions	Material	Max. nominal pressure	G	G1	L	Packaging unit	Article no.
		[bar]				[pieces]	
	Aluminium	16	G 1/4	2 x G 1/8	54	1	787890 
			G 1/4	3 x G 1/8	72	1	787891 
			G 1/4	4 x G 1/8	90	1	787892 
			G 1/4	5 x G 1/8	108	1	787893 
			G 3/8	2 x G 1/4	68	1	787894 
			G 3/8	3 x G 1/4	92	1	787895 
			G 3/8	4 x G 1/4	116	1	787896 
			G 3/8	5 x G 1/4	140	1	787897 
	Aluminium	16	G 1/4	4 x G 1/8	54	1	787717 
			G 1/4	6 x G 1/8	72	1	787718 
			G 1/4	8 x G 1/8	90	1	787719 
			G 1/4	10 x G 1/8	108	1	787720 
			G 3/8	4 x G 1/4	68	1	787721 
			G 3/8	6 x G 1/4	92	1	787722 
			G 3/8	8 x G 1/4	116	1	787723 
			G 3/8	10 x G 1/4	140	1	787724 
			G 1/2	6 x G 1/4	116	1	787725 
			G 1/2	8 x G 1/4	152	1	787726 
			G 1/2	10 x G 1/4	188	1	787727 